



# lateral valve

## type **KBS 15 Ex**



**2/2 way valve** **direct acting**  
**pressure range** PN 0-150 bar  
**orifice** DN 1,5-3 mm  
**connection** thread  
**function** valve normally closed symbol **NC**  
 valve normally open symbol **NO**



**△** Above stated body materials refer to the valve port connections that get in contact with the media only!

**design** direct acting, with spring return  
**body materials** ① brass ②  
 ③ brass, nickel plated ⑤  
 ④ ⑥ stainless steel  
**valve seat** synthetic resin on metal  
**seal materials** NBR FPM

**details needed**

- orifice
- port
- function NC/NO
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- nominal voltage

**general specifications**

**options**

<b>ports</b>	KBS	threads G 3/8	special threads
<b>function</b>		NC	NO
<b>pressure range</b>	bar	40   100   150	100   300   500
	DN	3   2   1,5	3   2   1,5
<b>Kv value</b>	l/min	5,2   1,3   1,1	5,2   1,3   1,1
<b>vacuum</b>	leak rate		< 10 <sup>-6</sup> mbar·l/s <sup>1</sup>
<b>pressure-vacuum</b>	P <sub>1</sub> ↔ P <sub>2</sub>		upon request
<b>back pressure</b>	P <sub>2</sub> > P <sub>1</sub>		upon request
<b>media</b>		gaseous - liquid	
<b>abrasive media</b>			
<b>damping</b>	opening		
	closing		
<b>flow direction</b>	A ↔ B	as marked	bi-directional upon request
<b>switching cycles</b>	1/min	120	300
<b>switching time</b>	ms	opening 250 closing 160	opening 120 closing 80
<b>media temperature</b>	°C	DC: -20 to +40	
		AC: -20 to +40	
<b>ambient temperature</b>	°C	DC: -20 to +40	
		AC: -20 to +40	
<b>limit switches</b>			
<b>manual override</b>			
<b>approvals</b>			WAZ
<b>mounting</b>			mounting holes
<b>weight</b>	kg	4,2	
<b>additional equipment</b>			upon request

**electrical specifications**

**options**

<b>nominal voltage</b>	U <sub>n</sub>	24 V	DC	special voltage	
	U <sub>n</sub>	230 V	40-60 Hz	AC	special voltage
<b>actuation</b>	DC	direct-current magnet			
	AC	direct-current magnet with separate rectifier outside of the explosion-proof area			
<b>insulation rating</b>	H	180°C			
<b>protection</b>	IP65				
<b>energized duty rating</b>	ED	100%			
<b>connection</b>	M16x1,5	terminal box			

**⚠** The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

**⚠** If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

<b>optional additional equipment</b>								
<b>current consumption</b>	U <sub>n</sub>	V-DC	24	200	48	98	110	220
	I <sub>n</sub>	A	1,20	0,15	0,68	0,30	0,28	0,14


**explosion proof** II 2 G Eex me II T4 and II 2 D IP65 T 130°C  
 PTB 02 ATEX 2120 X

**limit switches**

■ specifications not highlighted are standard  
 ■ specifications highlighted in grey are optional


# type **KBS 15 Ex**

function: **NC**  
closed when not energized

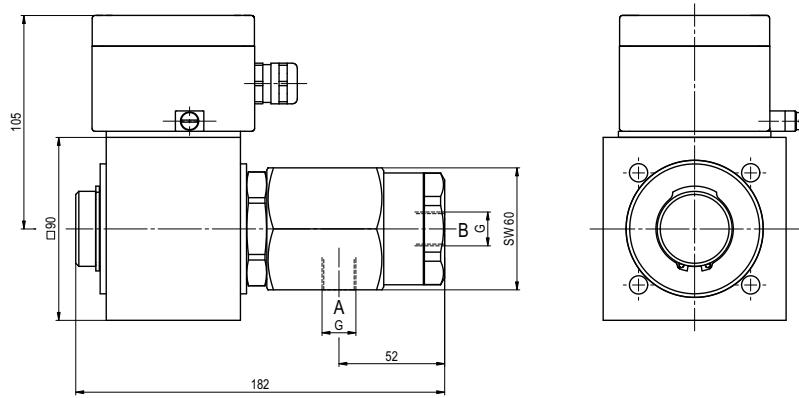

# type **KBS 15 Ex**

function: **NO**  
open when not energized

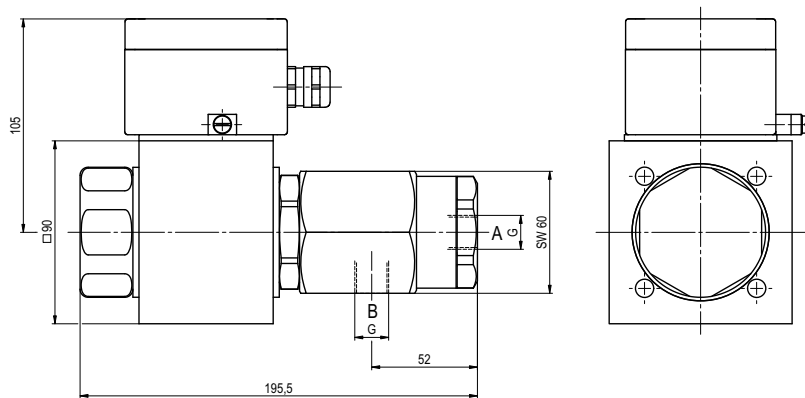

The application-specific layout relating to temperature, pressure conditions, switching behavior, media and its consistency may restrict the range of use or necessitate relevant modifications to materials used and seal arrangements.

Rights reserved to make technical alterations • Not responsible for printing errors • Detailed drawings can be obtained upon request