


# pressure limitation valve

## type **SPB-H 32**



**control valve** proportional  
**pressure range** PN 5-120 bar  
**orifice** DN 32 mm  
**connection** thread  
**function** stepless pressure regulation bypass version



Above stated body materials refer to the valve port connections that get in contact with the media only!

**design** externally controlled with spring return  
**body materials** ① ④  
 ② steel, galvanized ⑤  
 ③ ⑥  
**valve seat** metal on metal  
**seal materials** FPM, PTFE

**details needed for main valve**

- orifice
- port
- pressure regulating range
- flow rate
- media
- media temperature
- ambient temperature

**details needed for proportional valve**

- nominal voltage
- actuation pressure range min/max

**general specifications**

ports	SPB	threads G 1 1/2	<b>options</b>	SAE connection DIN ISO 6162
function		stepless regulation		
pressure regulation range	bar	5-120		
Kv value	m <sup>3</sup> /h	14,4		
media		liquid - highly viscous - contaminated		
abrasive media				
flow direction	P ⇌ T	as marked		
operating time	ms	< 900		
media temperature	°C	0 to +60		
ambient temperature	°C	0 to +50		
approvals				
mounting		mounting holes		
weight	kg	8,4		
additional equipment				

**electrical specifications**

nominal voltage	U <sub>B</sub>	DC 24 V (max. residual ripple 10%)	<b>options</b>	
power consumption	DC	< 0,7 A		
control signals	U <sub>E</sub>	0-10 V (R <sub>e</sub> 100KΩ)		
protection	IP65	acc. DIN 40 050		
energized duty rating	ED	100% (observe the connection conditions accordingly)		
connection		plug with 7 contacts / wire diameter 6-8 mm		


**pneumatic specifications**

actuation pressure range	bar	see actuation pressure-diagram	<b>options</b>	
air consumption		DIN ISO 8573-1 grade of compressed air quality 5/4/3		
control		by 3/2-way proportional valve		
actuator ports	1	G 1/8		

The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

**connection plan**

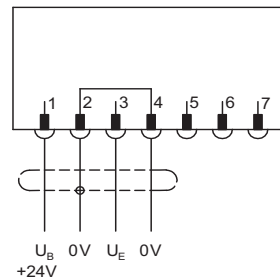

**connection conditions**


When supplying the electrical set point signal to the proportional valve, the actuating air must already be present. (see actuation pressure-diagram)

**position of installation**


arbitrarily, but regulator not downwards

■ specifications not highlighted are standard  
 ■ specifications highlighted in grey are optional


# type **SPB-H 32**

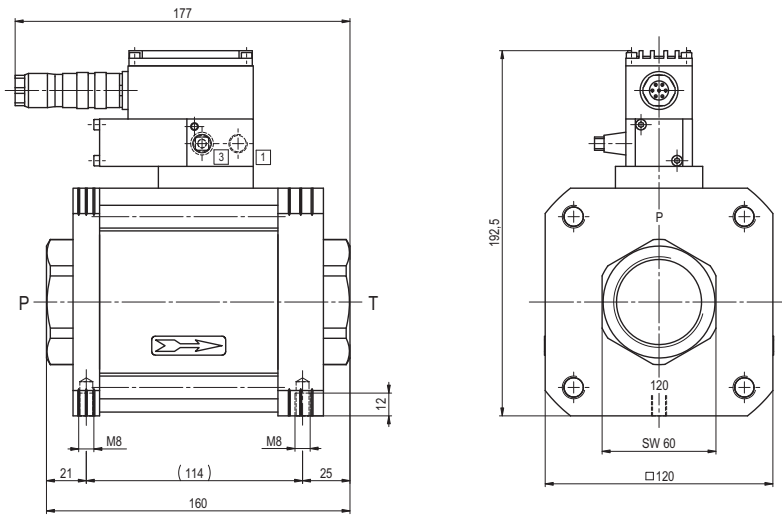

**actuation pressure-diagram**

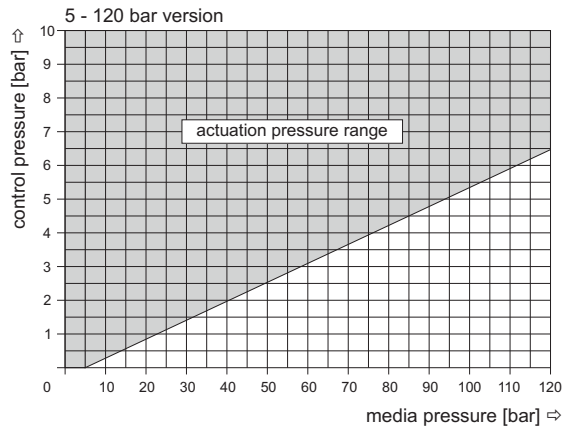

**pressureless circulation mode**

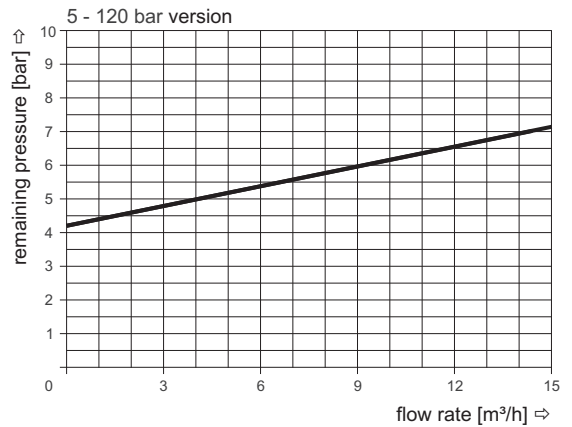

**Sound creation during low pressure circulation mode and flow  $Q=14,4 \text{ m}^3/\text{h}$ : ca. 70 dbA**