


pressure reduction valve

type SPI 08



control valve proportional
pressure range PN 0-200 bar
orifice DN 8 mm
connection thread
function stepless pressure regulation inline-version



Above stated body materials refer to the valve port connections that get in contact with the media only!

design externally controlled with spring return
body materials ① brass ④
 ② ⑤
 ③ ⑥
valve seat synthetic resin on metal
seal materials NBR FPM

details needed for main valve

- orifice
- port
- pressure regulating range
- flow rate
- media
- media temperature
- ambient temperature

details needed for proportional valve

- nominal voltage
- actuation pressure range min/max

	ports	SPI	threads G 3/8	options
function	function		stepless regulation	
	pressure regulation range	bar	10-200	
Kv value	Kv value	m ³ /h	max. 1,3	
	media		gaseous - liquid	
abrasive media				
flow direction	flow direction	A ⇌ B	as marked	
operating time	operating time	ms	< 100	
media temperature	media temperature	°C	0 to +60	
ambient temperature	ambient temperature	°C	0 to +50	
approvals				WAZ
mounting				
weight	weight	kg	3,7	
additional equipment				

electrical specifications

	nominal voltage	U _B	DC 24 V (max. residual ripple 10%)	options
power consumption	power consumption	DC	< 0,7 A	
control signals <td>control signals</td> <td>U_E</td> <td>0-10 V (R_e 10KΩ)</td> <td></td>	control signals	U _E	0-10 V (R _e 10KΩ)	
protection	protection	IP65	acc. DIN 40 050	
energized duty rating	energized duty rating	ED	100% (observe the connection conditions accordingly)	
connection	connection		plug with 7 contacts / wire diameter 6-8 mm	


pneumatic specifications

	actuation pressure range	bar	see actuation pressure-diagram	options
air consumption	air consumption		DIN ISO 8573-1 grade of compressed air quality 5/4/3	
control	control		by 3/2-way proportional valve	
actuator ports	actuator ports	1	G 1/8	

The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

connection plan

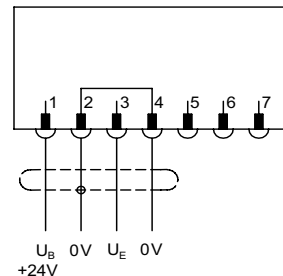

connection conditions


When supplying the electrical set point signal to the proportional valve, the actuating air must already be present. (see actuation pressure-diagram)

position of installation

arbitrarily, but regulator not downwards

■ specifications not highlighted are standard
 ■ specifications highlighted in grey are optional

type SPI 08

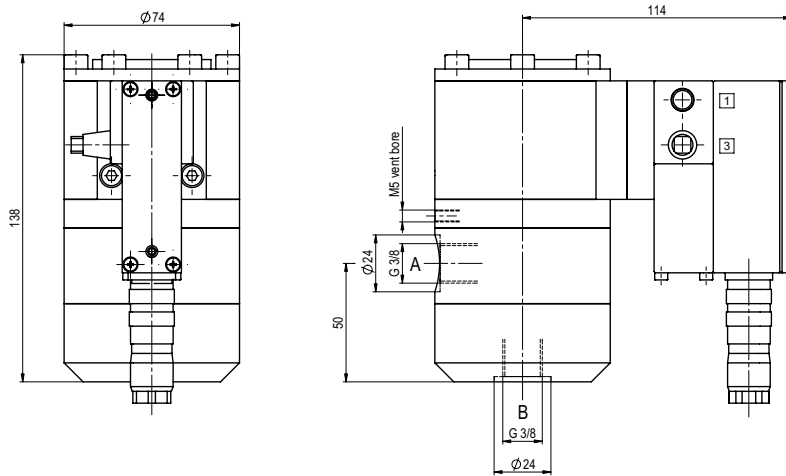

actuation pressure-diagram

