pressure reduction valve

type SPP-1 15 PC
SPP-2 15 PC

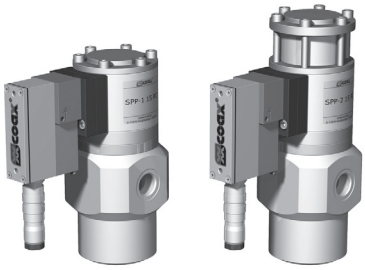

control valve proportional	**externally controlled**
pressure range	PN 0-80 bar
orifice	DN 15 mm
connection	thread/cartridge
function	stepless pressure regulation inline-version



⚠ Above stated body materials refer to the valve port connections that get in contact with the media only!

design	externally controlled with spring return	
body materials	⓪ aluminium	④
	① brass	⑤
	③	⑥ stainless steel
valve seat	synthetic resin on metal / metal on metal	
seal materials	EPDM, PU, HNBR	FPM

details needed for main valve

- orifice
- port
- pressure regulating range
- flow rate
- media
- media temperature
- ambient temperature

details needed for proportional valve

- nominal voltage
- actuation pressure range min/max

general specifications

			options
ports	SPP-1	with valve body G 1/2 - G 3/4	without valve body
	SPP-2	with valve body G 1/2 - G 3/4	without valve body
function		stepless regulation	
pressure regulation range	bar	SPP-1 5-40	SPP-2 5-80
Kv value	m³/h	max. 6,0	
media		gaseous - liquid - highly viscous - contaminated	
abrasive media			version available
flow direction	A ⇨ B	as marked	
operating time	ms	< 200	
media temperature	°C	0 to +60	
ambient temperature	°C	0 to +50	
approvals			WAZ
mounting			mounting holes
weight	kg	SPP-1 4,2 SPP-2 4,5	SPP-1 3,1 SPP-2 3,4
additional equipment			

electrical specifications

		options
nominal voltage	U_B	DC 24 V (max. residual ripple 10%)
power consumption	DC	< 0,7 A
control signals	U_E	0-10 V (R_E 10KΩ)
protection	IP65	acc. DIN 40 050
energized duty rating	ED	100% (observe the connection conditions accordingly)
connection		plug with 7 contacts / wire diameter 6-8 mm

pneumatic specifications

		options
actuation pressure range	bar	see actuation pressure-diagram
air consumption		DIN ISO 8573-1 grade of compressed air quality 5/4/3
control		by 3/2-way proportional valve
actuator ports	1	G 1/8

⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

connectionplan



connection conditions

When supplying the electrical set point signal to the proportional valve, the actuating air must already be present. (see actuation pressure-diagram)

position of installation

arbitrarily, but regulator not downwards

- specifications not highlighted are standard

specifications highlighted in grey are optional

type **SPP-1 15 PC**

drilling design for cartridge

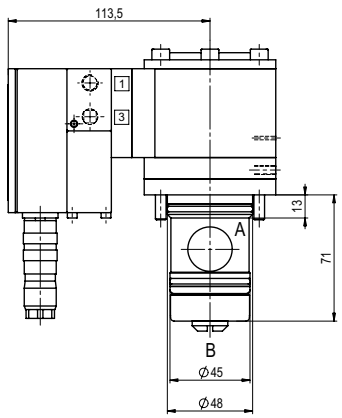

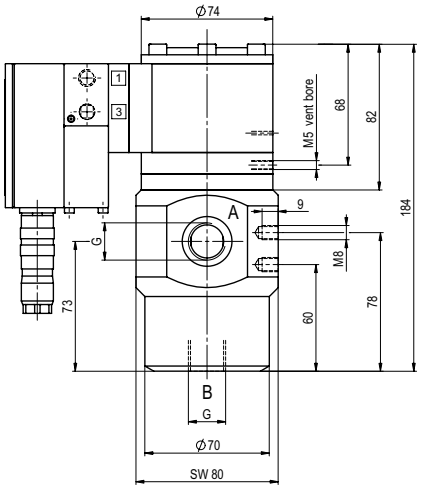

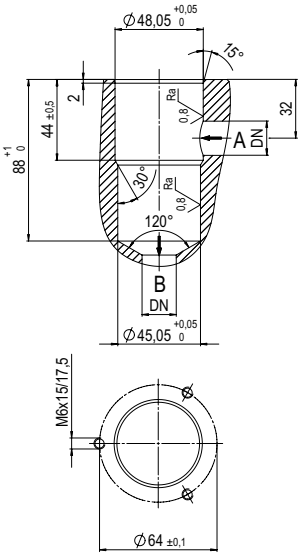

type **SPP-2 15 PC**

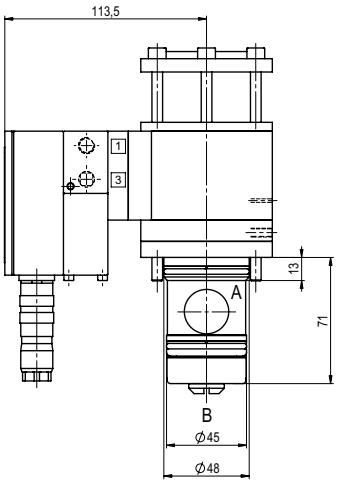

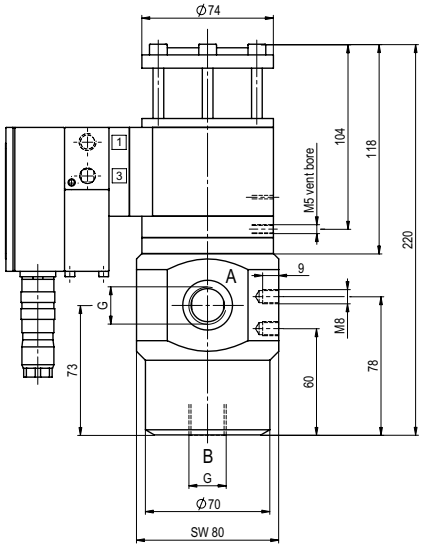

actuation pressure-diagram

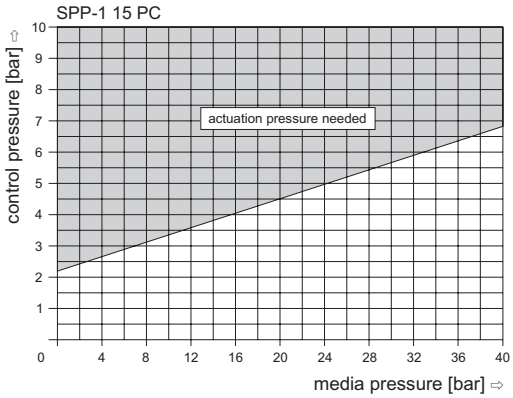

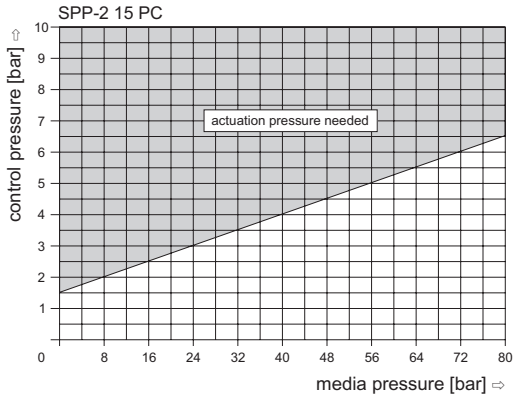

The application-specific layout relating to temperature, pressure conditions, switching behavior, media and its consistency may restrict the range of use or necessitate relevant modifications to materials used and seal arrangements.

Rights reserved to make technical alterations • Not responsible for printing errors • Detailled drawings can be obtained upon request