


coaxial valve

type VSV-F 80 DR



5-VSV-F 80 DR

valve type with pilot valve

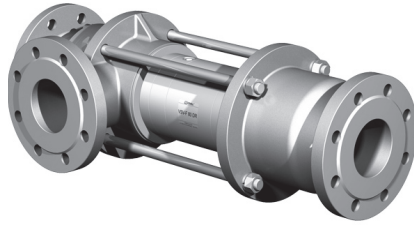

3/2 way valve
pressure range PN 0-40 bar
orifice DN 80 mm
connection flange
function valve normally closed (A ► B)
symbol **NC**

valve normally open (A ► B)
symbol **NO**



△ Above stated body materials refer to the valve port connections that get in contact with the media only!

design pressure balanced, with spring return, intersecting switch-over
body materials ① aluminium ② steel, galvanized
 ③ ⑤ without non-ferr. metals
 ④ steel, nickel plated ⑥ stainless steel
valve seat synthetic resin on metal
seal materials NBR PTFE, FPM, CR, EPDM

details needed for main valve

- orifice
- port
- function NC/NO
- operating pressure
- inlet pressure at A, B or C
- flow rate
- media
- media temperature
- ambient temperature
- type of actuation

details needed for pneumatic actuation

- nominal voltage
- type of protection
- actuation pressure range min/max
- low wattage coil, actuation pressure range 4-7 bar
- pilot valve type

details needed for hydraulic actuation

- actuation pressure range min/max
- hydraulic control valve function

⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

■ specifications not highlighted are standard
 ■ specifications highlighted in grey are optional

general specifications		options
ports	VSV-F flanges PN 16/40	special flanges
function	NC	NO
pressure range	bar 0-16/0-40 A ⇒ B max.40 / B ⇒ A max.16 / A ⇒ C max.40 / C ⇒ A max.40	
Kv value	m ³ /h 90,0	
vacuum	leak rate < 10 ⁻⁶ mbar·l·s ⁻¹	
pressure-vacuum	P ₁ ⇔ P ₂	pressure side max. 40 bar vacuum side leak rate upon request
back pressure	P ₂ > P ₁ see pressure range	
media	gaseous - liquid - highly viscous - gelatinous - pasty - contaminated	version available
abrasive media	damping opening by throttles on pilot valve closing see pressure range	
flow direction	1/min 50	
switching cycles	ms opening 250-3000 closing 250-3000	
switching time	°C direct mounted pilot valve 60	remote mounted pilot valve outside temperature range of media max.160°C
media temperature	°C direct mounted pilot valve 50	available
ambient temperature	flush ports available	
leak ports	limit switches inductive/mechanical upon request	
manual override	via pilot valve	LR/GL/WAZ
approvals	kg VSV-F 26,8	
mounting	additional equipment upon request	
weight		


electrical specifications		options
nominal voltage	U _n DC 24V	special voltage upon request
power consumption	U _n AC 230V 50 Hz	special voltage upon request
protection	DC 4,8 W	2,5 W
energized duty rating	AC pick up 11,0 VA holding 8,5 VA	
connection	IP 65 (P54) acc. DIN 40 050	
additional equipment	ED 100%	
optional	plug acc. DIN EN 175301-803 form B, 4 positions x 90° / wire diameter 6-8 mm	connector acc. VDMA
max. temperature	M12x1 connector acc. DESINA	
explosion proof	media 60°C	
	ambient 50°C	
	EEx m II T5 nominal voltage U _n	direct current 24 V 3,25 W
	power consumption	alternating current 230 V 50 Hz 2,90 W

pneumatic specifications		options
actuation pressure range	bar 4-10	
air consumption	cm ³ /stroke 75	
cycle speed	main valve speed variable by throttles on pilot valve	
control	preferably 5/2-way pilot valve	
actuator ports	2/4 G 1/4	G 3/8

hydraulic specifications		options
actuation pressure range	bar 10-30 / 30-60	upon request
by media	preferably 4/2-way control valve	
control	X/Y G 1/4	NPT 1/4
actuator ports		

type VSV-F 80 DR


function: **NC**
closed when not energized (A ► B)

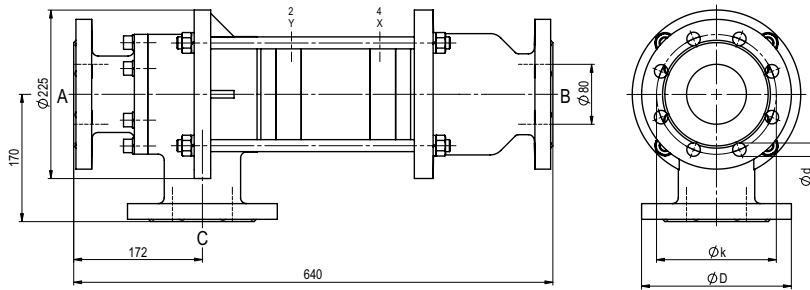


flanges PN	DIN	$\varnothing D$	$\varnothing k$	$\varnothing d$
16	2633	200	160	18
40	2635	200	160	18

type VSV-F 80 DR


function: **NO**
open when not energized (A ► B)

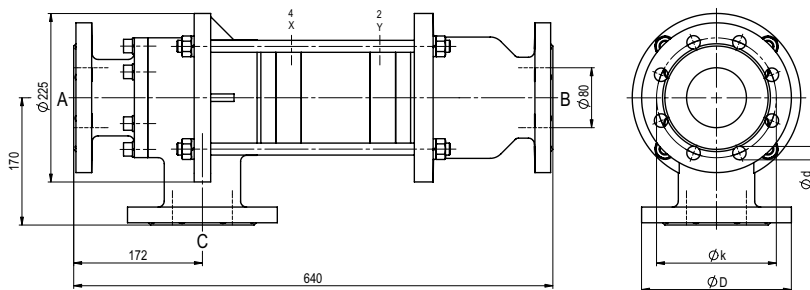

pneumatic actuation



5/2-way-pilot valve
flow rate 700 l/min
pressure range 3-10 bar G 1/8



5/2-way-pilot valve ISO 1
flow rate 700 l/min
pressure range 3-10 bar G 1/4

The application-specific layout relating to temperature, pressure conditions, switching behavior, media and its consistency may restrict the range of use or necessitate relevant modifications to materials used and seal arrangements.

Rights reserved to make technical alterations • Not responsible for printing errors • Detailed drawings can be obtained upon request